


40V N-Channel Enhancement Mode Power MOSFET

Description

WMO120N04TS uses advanced power trench technology that has been especially tailored to minimize the on-state resistance and yet maintain superior switching performance.

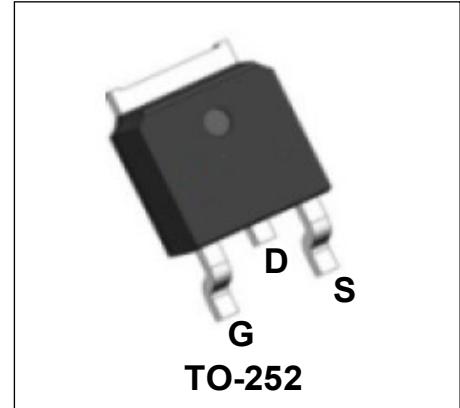


Features

- $V_{DS} = 40V$, $I_D = 120A$
 $R_{DS(on)} < 3.8m\Omega$ @ $V_{GS} = 10V$
 $R_{DS(on)} < 5.2m\Omega$ @ $V_{GS} = 4.5V$
- High Density Cell Design
- Low $R_{DS(on)}$
- 100% EAS Guaranteed



Applications

- Power Management Switches
- DC/DC Converter



Absolute Maximum Ratings ($T_A = 25^\circ C$, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current $T_c=25^\circ C$	I_D	120	A
$T_c=100^\circ C$		76	
Pulsed Drain Current ¹	I_{DM}	480	A
Single Pulse Avalanche Energy ²	E_{AS}	140.45	mJ
Total Power Dissipation $T_c=25^\circ C$	P_D	96	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance from Junction-to-Ambient ³	R_{JA}	56	°C/W
Thermal Resistance from Junction-to-Case	R_{JC}	1.3	°C/W

Electrical Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	40	-	-	V
Gate-body Leakage current	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 20\text{V}$	-	-	± 100	nA
Zero Gate Voltage Drain Current $T_J=25^\circ\text{C}$ $T_J=100^\circ\text{C}$	I_{DSS}	$V_{\text{DS}} = 40\text{V}, V_{\text{GS}} = 0\text{V}$	-	-	1	μA
			-	-	100	
Gate-Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	1	1.6	2.5	V
Drain-Source On-Resistance ⁴	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$	-	3	3.8	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5\text{V}, I_D = 15\text{A}$	-	3.8	5.2	
Forward Transconductance ⁴	g_{fs}	$V_{\text{DS}} = 10\text{V}, I_D = 20\text{A}$	-	100	-	S
Dynamic Characteristics⁵						
Input Capacitance	C_{iss}	$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$	-	5210	-	pF
Output Capacitance	C_{oss}		-	430	-	
Reverse Transfer Capacitance	C_{rss}		-	325	-	
Gate Resistance	R_G	$f = 1\text{MHz}$	-	1	-	Ω
Switching Characteristics⁵						
Total Gate Charge	Q_g	$V_{\text{GS}} = 10\text{V}, V_{\text{DS}} = 20\text{V}, I_D = 20\text{A}$	-	95	-	nC
Gate-Source Charge	Q_{gs}		-	9.5	-	
Gate-Drain Charge	Q_{gd}		-	18.5	-	
Turn-On Delay Time	$t_{\text{d(on)}}$	$V_{\text{GS}} = 10\text{V}, V_{\text{DD}} = 20\text{V}, R_G = 3\Omega, I_D = 20\text{A}$	-	15.8	-	ns
Rise Time	t_r		-	30.5	-	
Turn-Off Delay Time	$t_{\text{d(off)}}$		-	150	-	
Fall Time	t_f		-	82	-	
Body Diode Reverse Recovery Time	t_{rr}	$I_F = 20\text{A}, dI/dt = 100\text{A}/\mu\text{s}$	-	32	-	ns
Body Diode Reverse Recovery Charge	Q_{rr}		-	19.2	-	nC
Drain-Source Body Diode Characteristics						
Diode Forward Voltage ⁴	V_{SD}	$I_S = 20\text{A}, V_{\text{GS}} = 0\text{V}$	-	-	1.2	V
Continuous Source Current	$T_C=25^\circ\text{C}$	I_S	-	-	120	A

Notes:

- Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$.
- The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=25\text{V}, V_{\text{GS}}=10\text{V}, L=0.1\text{mH}, I_{\text{AS}}=53\text{A}$.
- The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper, The value in any given application depends on the user's specific board design.
- The data tested by pulsed , pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
- This value is guaranteed by design hence it is not included in the production test.

Typical Characteristics

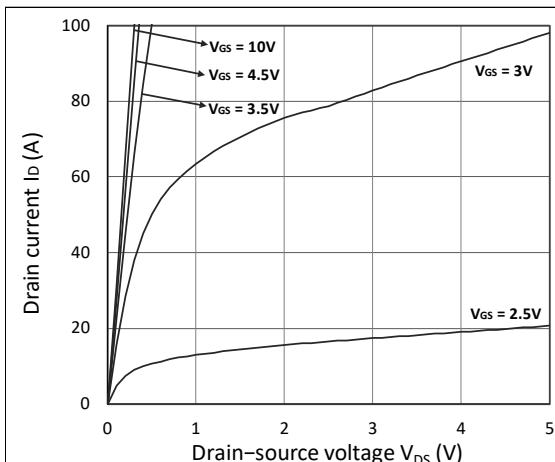


Figure 1. Output Characteristics

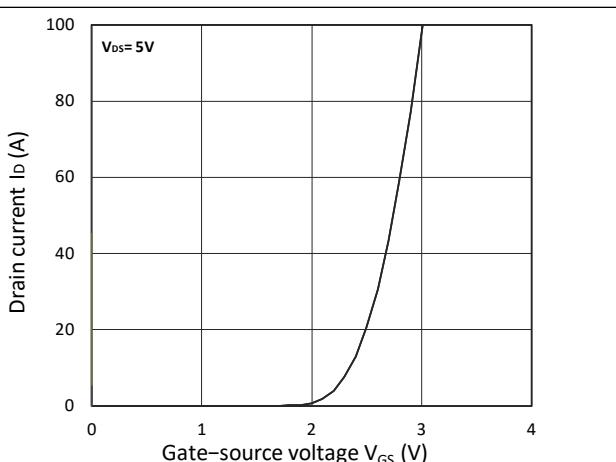


Figure 2. Transfer Characteristics

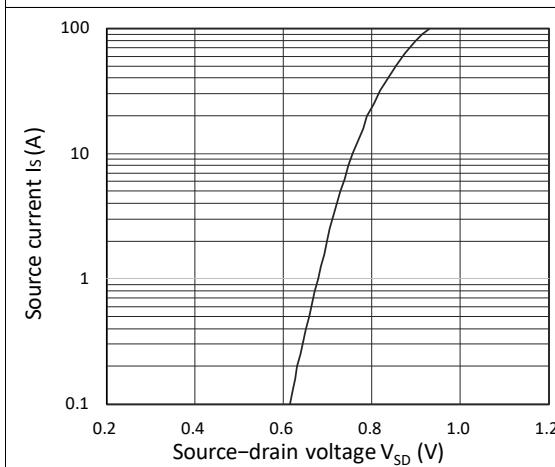
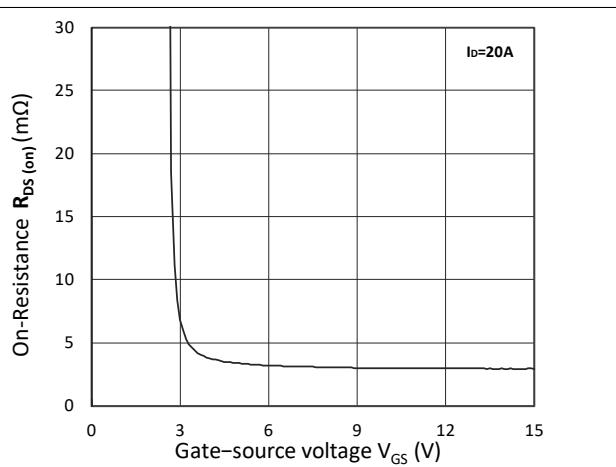
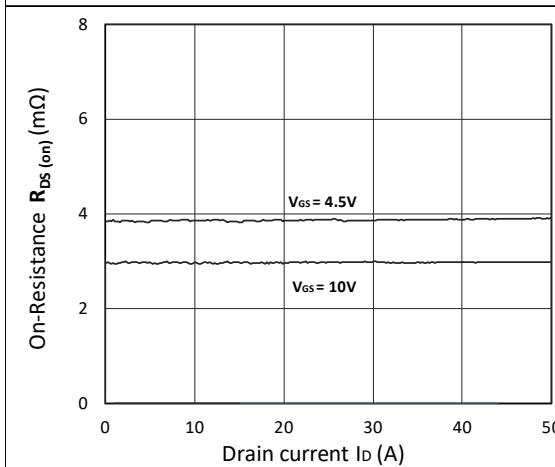
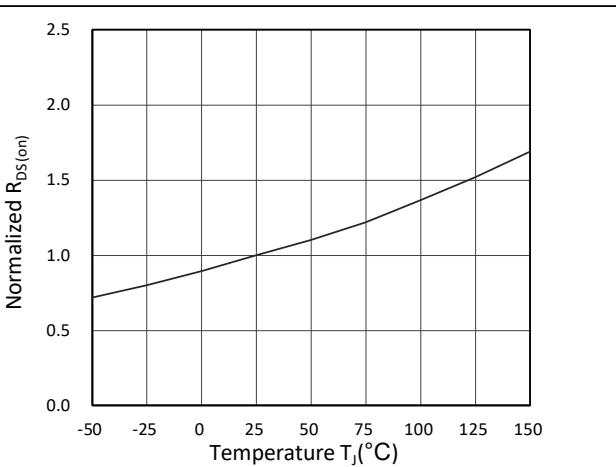


Figure 3. Forward Characteristics of Reverse

Figure 4. $R_{DS(on)}$ vs. V_{GS} Figure 5. $R_{DS(on)}$ vs. I_D Figure 6. Normalized $R_{DS(on)}$ vs. Temperature

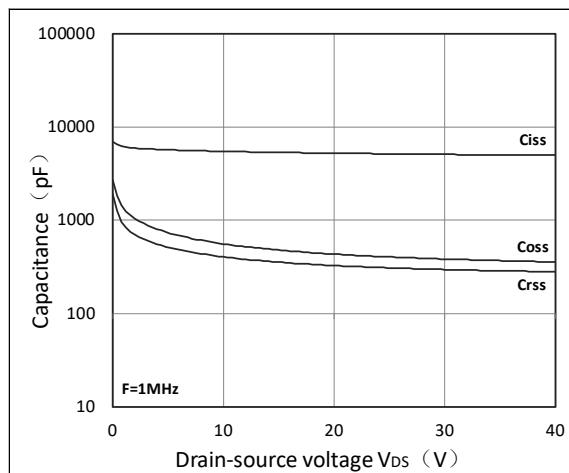


Figure 7. Capacitance Characteristics

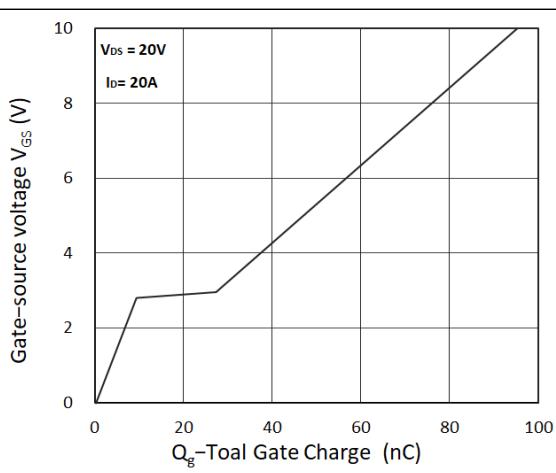


Figure 8. Gate Charge Characteristics

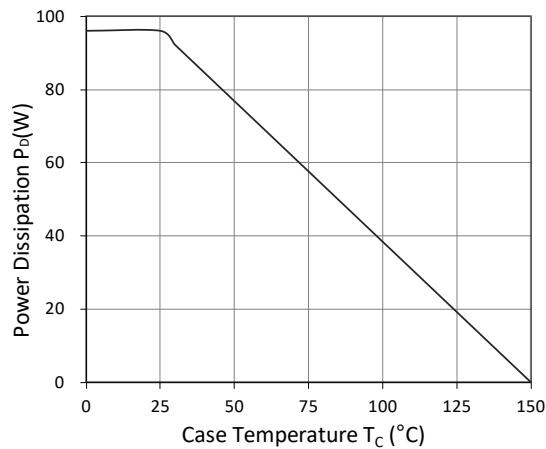


Figure 9. Power Dissipation

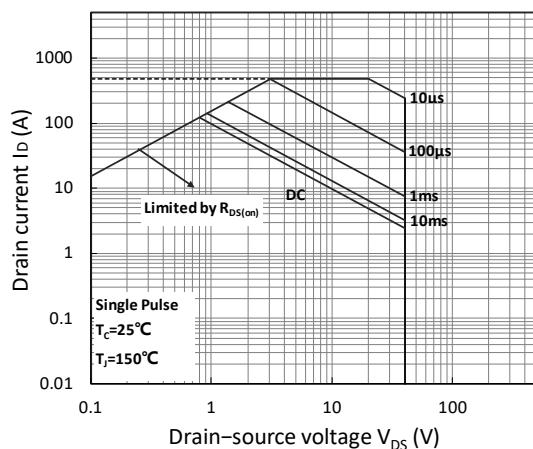


Figure 10. Safe Operating Area





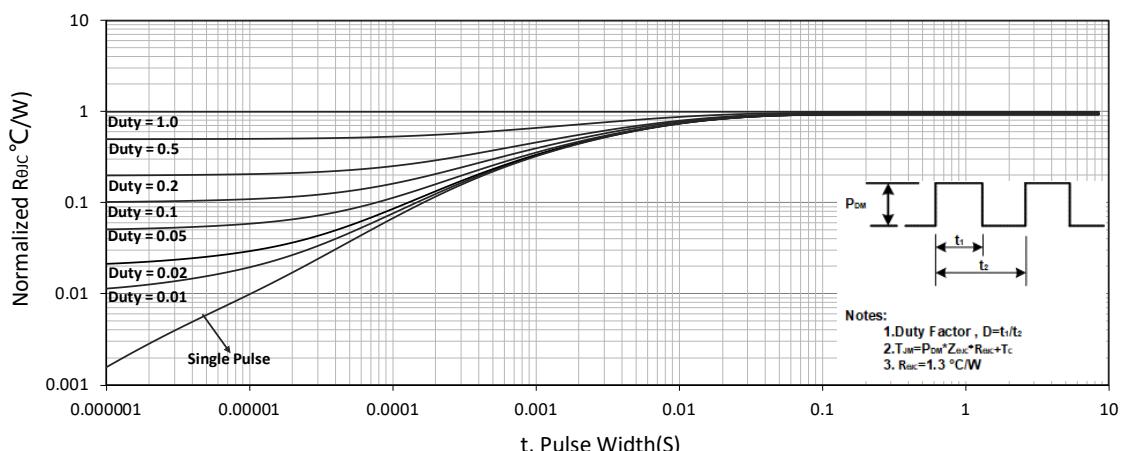


Figure 11. Normalized Maximum Transient Thermal Impedance

Test Circuit**Figure A. Gate Charge Test Circuit & Waveforms****Figure B. Switching Test Circuit & Waveforms****Figure C. Unclamped Inductive Switching Circuit & Waveforms**

Mechanical Dimensions for TO-252


COMMON DIMENSIONS

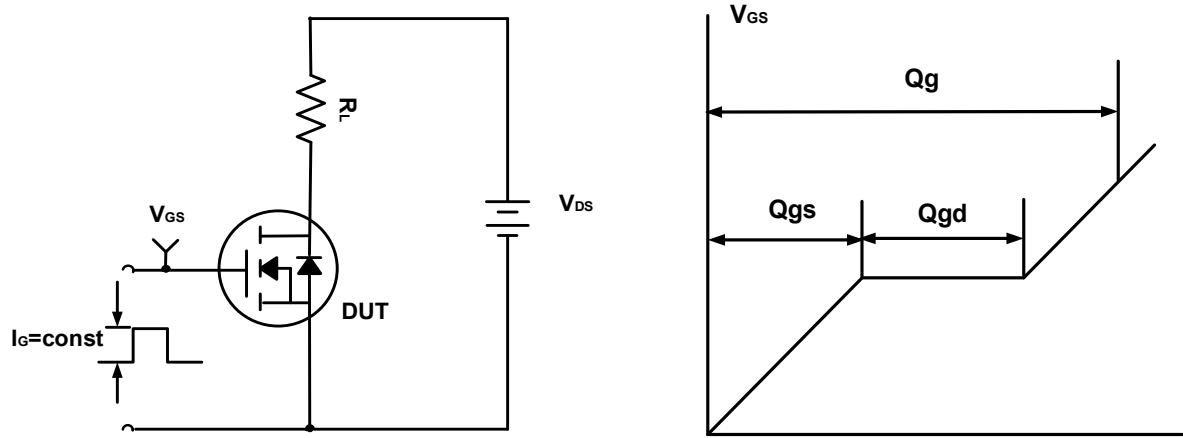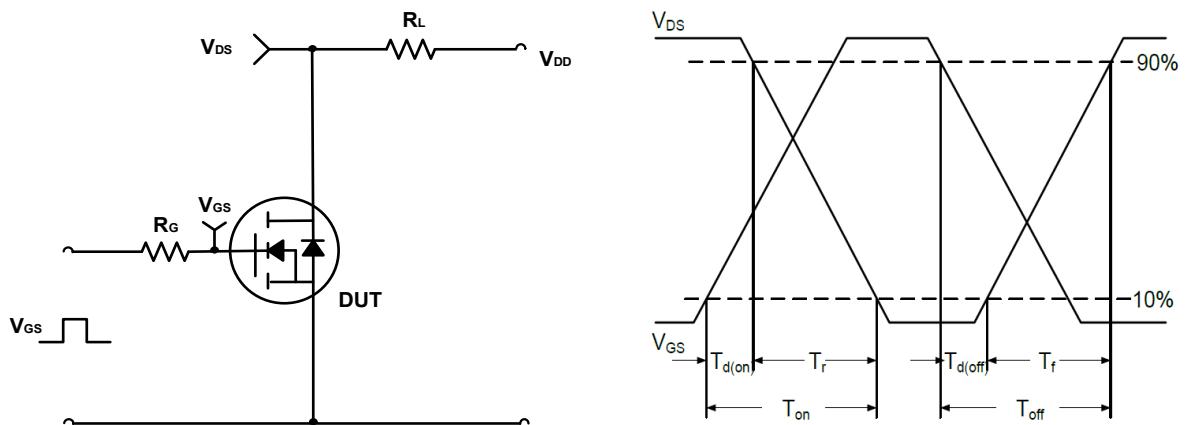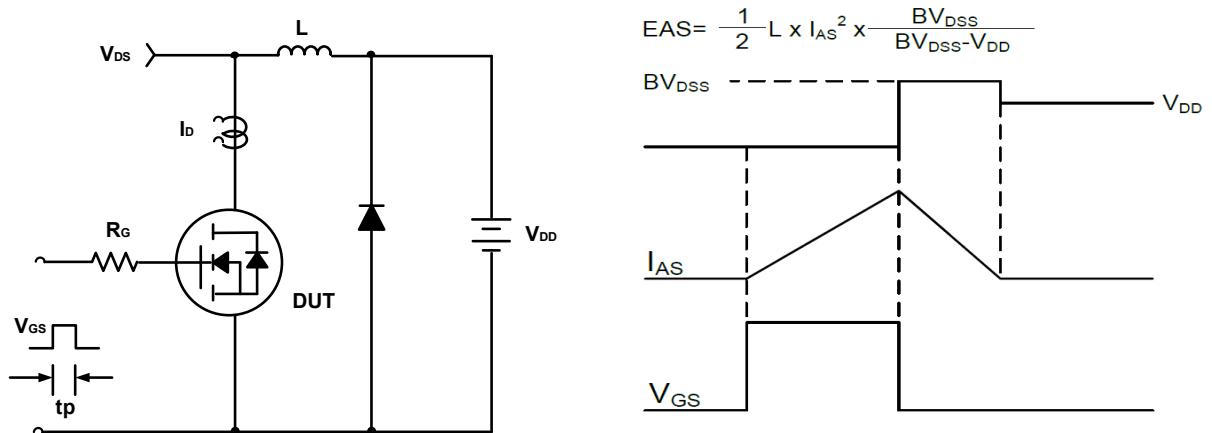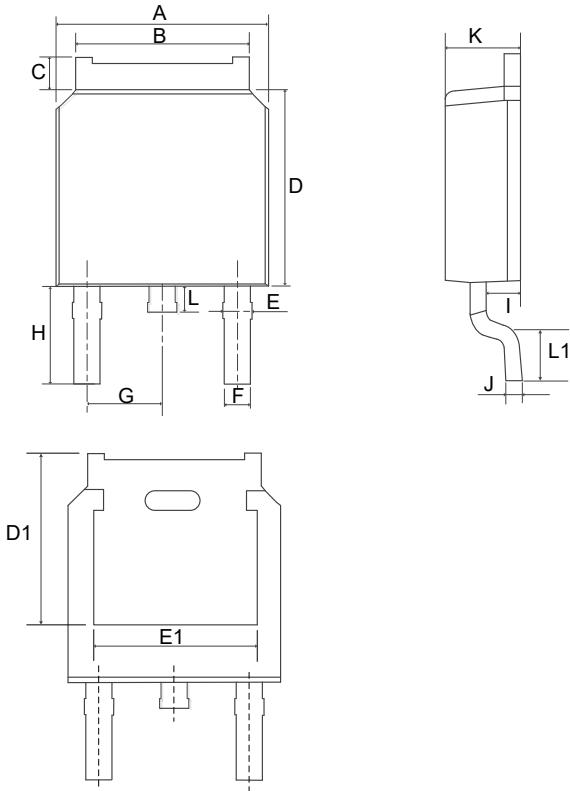

SYMBOL	MM	
	MIN	MAX
A	6.40	6.80
B	5.13	5.50
C	0.88	1.28
D	5.90	6.22
D1	5.35REF	
E	0.68	1.10
E1	4.83REF	
F	0.68	0.91
G	2.29REF	
H	2.90REF	
I	0.85	1.17
J	0.51REF	
K	2.10	2.50
L	0.40	1.00
L1	1.50REF	

Ordering Information

Part	Package	Marking	Packing method
WMO120N04TS	TO-252	WMO120N04TS	Tape and Reel

Marking Information

WMO120N04TS= Device code

WWXX XXX= Date code